

ETTA EYELID BRONZE 2700K

SCEU27063

LUMINAIRE REF:

PROJECT REF:




BRONZE

RECESSED TASK AND DISPLAY BRONZE LIGHT

The Etta Eyelid is a precision engineered LED under cabinet light that can also be used for recessed task and display lighting. It comes with an in-built eyelid to minimise glare where the product would catch your eyeline. It is suitable for under shelf lighting, bespoke cabinetry, kitchens and marine lighting. Can be used to create continuous light onto a work surface under a kitchen cabinet. It is now available in both 2700K and 2400K to suit your interiors.

The Etta is also available without an Eyelid. "The Etta is a precision engineered LED under cabinet light that can also be used for recessed task and display lighting. It is suitable for under shelf lighting, bespoke cabinetry, kitchens and marine lighting. Can be used to create continuous light onto a work surface under a kitchen cabinet. It is now available in both 2700K and 2400K to suit your interiors. The Etta under cabinet light is also available with an eyelid to minimise glare - see Etta Eyelid. Independently tested by the Eurofins."



WIDE WASH

ACCESSORIES



SURFACE MOUNT
COLLAR WHITE
ACUCSM012



SURFACE MOUNT
COLLAR BRONZE
ACUCSM062



SURFACE MOUNT
COLLAR
ALUMINIUM
ACUCSM102



WWW.JOHN CULLEN LIGHTING.COM


UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

ETTA EYELID BRONZE 2700K
SCEU27063

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	WIDE WASH
BEAM ANGLE (°)	90°
LED SOURCE LUMENS (LM)	330 lm
LUMINAIRE LUMENS (LM)	265 lm
INTENSITY RATING (CD)	130
POWER CONSUMPTION (W)	3W
LUMINAIRE EFFICACY (LM/W)	88 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	8.5V DC

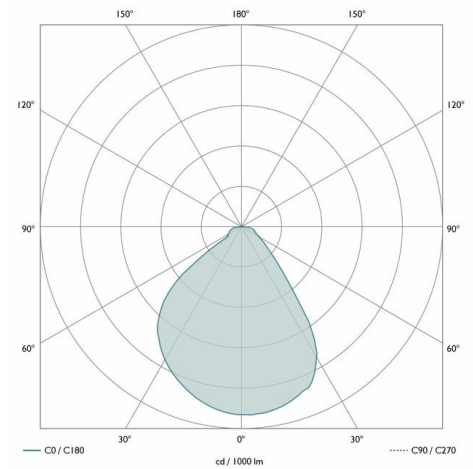

INGRESS RATING	IP54
IMPACT RATING	IK02
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core PVC (80 °C)
CABLE SIZE	2 off 22 AWG 7/30 (0.33mm2) Copper Strands
CABLE LENGTH	2000mm
CONNECTOR TYPE	N/A
WEIGHT	40g
FIRE RATED	N/A



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81